



GAMMON TECHNICAL PRODUCTS, INC.
P.O. BOX 400 - 2300 HWY 34
MANASQUAN, N.J. 08736


PHONE 732-223-4600
FAX 732-223-5778
EMAIL gammontech@gammontech.com

**SENSING HOSE
DEADMAN HOSE
ACCESSORIES**

**BULLETIN 78
(8-11)**

DUAL AIR - FUEL SENSING HOSE

BOTH HOSES HAVE 3/8" NITRILE TUBES FOR FUEL RESISTANCE

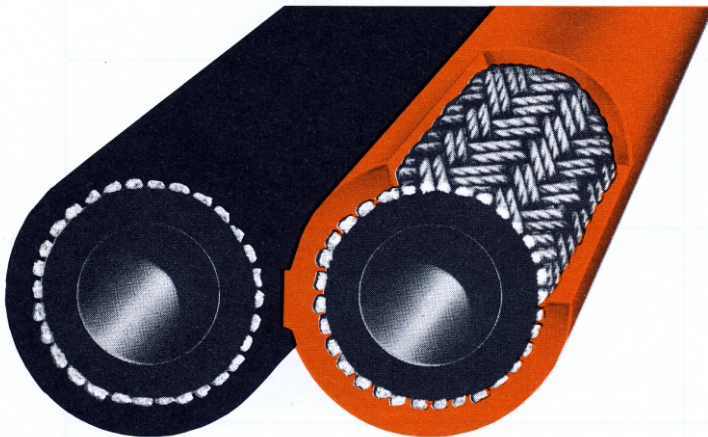


For hydrant pit valve connection to the cart or servicer. Orange hose is for air pressure reference - black hose is for fuel pressure sensing. Both hoses are braided reinforced and are formed together in a continuous bond. Both hoses have 3/8" inside diameter nitrile (Buna N) tubes for fuel resistance. Outer covers are neoprene. Manufactured exclusively for Gammon Technical to our specifications; we are confident that this is the most durable and reliable dual sensing hose available

ORDER OUR **MODEL GTP-2123**.
AVAILABLE IN CUT LENGTHS OR REELS,
WITH OR WITHOUT FITTINGS.

Operating pressure rating: 200psi
Burst pressure rating: More than 800 psi

DEADMAN HOSE

BOTH HOSES HAVE NEOPRENE CONSTRUCTION - BUNA-N TUBES

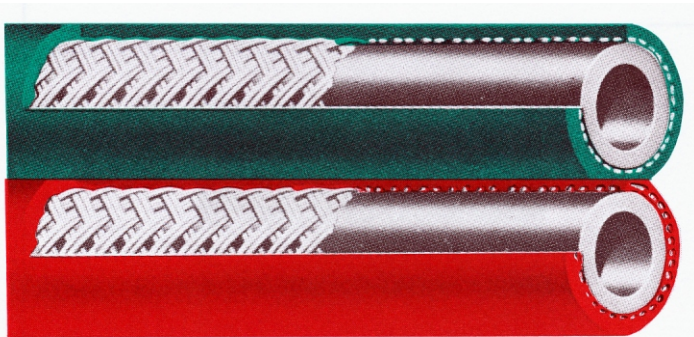

ORDER **MODEL GTP-1202**. AVAILABLE IN
CUT LENGTHS OR REELS, WITH OR
WITHOUT FITTINGS.

Manufactured to Gammon Technical specifications, this hose is superior to any available air deadman hose on the market. It is suitable for all refueling operations.

The tubes are made of Buna N (Nitrile rubber) to resist fuel from cross-leakage in the control system. The braided reinforced tubes have neoprene covers to resist oils that contaminate ramp areas. A special additive is included to give the cover superior resistance to cracking.

Operating pressure rating: 200psi
Burst pressure rating: More than 800 psi

FITTINGS AND CONNECTORS

MALE TUBE CONNECTOR

- GTP-2421 - 4-4 1/4" Tube, 1/4" NPT
4-6 1/4" Tube, 3/8" NPT
6-4 3/8" Tube, 1/4" NPT
6-6 3/8" Tube, 3/8" NPT

A swivel version of this is also available (not in 4x6). Specify Model GTP-5862-



FEMALE TUBE CONNECTOR

- GTP- 2422 - 4-4 1/4" Tube, 1/4" NPT
4-6 1/4" Tube, 3/8" NPT
6-4 3/8" Tube, 1/4" NPT
6-6 3/8" Tube, 3/8" NPT



FEMALE-ROTABLE-TUBE CONNECTOR


Nut will rotate to allow tightening but will not swivel when tightened

- GTP-2423 - 4-4 1/4" Tube, 1/4" NPT
6-6 3/8" Tube, 3/8" NPT



HEX NIPPLE

- HN4B 1/4"NPT both ends
HN6B 3/8"NPT both ends
RHN6-4B 3/8"NPT one end/ 1/4"NPT other end



FERRULES


- GTP-2424 for hoses with O.D. of 17/32", such as deadman hose GTP-1202, as seen on other side.
GTP-2425 for hoses with O.D. of 23/32", such as sensing hose GTP-2123 as seen on other side.



NOTE: All of above are supplied in Brass. If Stainless Steel is required, add SS at the end of the Model number.

FERRULE CRIMPING TOOL

- GTP-2426 Use on 1/4" I.D. hose and 3/8" I.D. hose.



HOSE CLAMP - WORM DRIVE

Stainless Steel

- GTP-2427 fits hoses having O.D. of 3/8" to 25/32".



STOP BALL

- GTP-1203 Molded of durable plastic in 2 halves to form a sphere. Material is brilliant orange polyethylene. Holes for single hose or dual hose are custom drilled to fit. Outside diameter 3".

