


BT-HPC Hochgeschwindigkeitskraftspannfutter
BT-HPC High-speed Power Chuck

MAX
30,000
min⁻¹

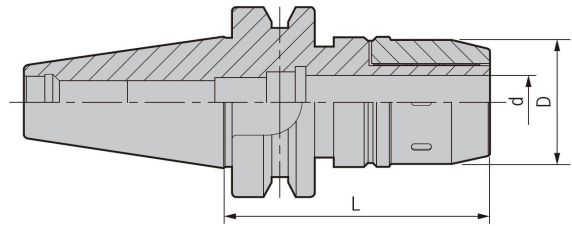

Einheit/Unit (mm)

Artikel Item	Bereich Range	D	d	L	Geeignete Spannzone Suit collet	Gewicht Weight	
BT30-	HPC16-70	3-16	46	16	70	SC16	1,40
	HPC20-75	4-20	53	20	75	SC20	1,80
BT40-	HPC16-70	3-16	46	16	70	SC16	1,60
	HPC16-105	3-16	46	16	105	SC16	1,80
	HPC16-135	3-16	46	16	135	SC16	2,30
	HPC20-80	4-20	53	20	80	SC20	2,40
	HPC20-105	4-20	53	20	105	SC20	2,50
	HPC20-135	4-20	53	20	135	SC20	2,80
	HPC32-105	6-32	68	32	105	SC32	2,80
	HPC32-135	6-32	68	32	135	SC32	3,00
BT50-	HPC16-90	3-16	46	16	90	SC16	3,90
	HPC16-110	3-16	46	16	110	SC16	4,10
	HPC16-135	3-16	46	16	135	SC16	4,30
	HPC16-150	3-16	46	16	150	SC16	4,50
	HPC20-105	4-20	53	20	105	SC20	4,50
	HPC20-135	4-20	53	20	135	SC20	4,70
	HPC20-150	4-20	53	20	150	SC20	4,90
	HPC32-110	6-32	68	32	110	SC32	5,20
	HPC32-135	6-32	68	32	135	SC32	5,90
	HPC32-165	6-32	68	32	165	SC32	6,60

Merkmale

- Geeignet für Hochgeschwindigkeits- und Präzisionszerspannung
- Gewuchtet: G6,3; 12,000 U/m

Features

- Suitable for high-speed and high precision cutting;
- Balanced: G6,3; 12,000 rpm;