


Watertight Devices
 30A, 125/250V AC, 3 Pole, 4 Wire
 Twist-Lock® Receptacle

HUBBELL



Features

- Impact resistant PBT lid, cover plate, and receptacle body
- Thermoplastic elastomer seal
- Stainless steel hardware and corrosion-resistant connection points



Ordering Information


| Description | Device Color | UPC | Catalog Number |
|---|--------------|--------------|----------------|
| Thermoplastic elastomer yellow receptacle | Yellow | 783585433271 | HBL69W74 |

Listings

Listed to UL498
 Certified to CSA C22.2 No. 42
 Meets NEMA WD-1, WD-6 and ANSI standards
 UL Listed, CSA Certified to Type 4, 4X, 12, 6, 6P

Specifications

| | |
|-------------------|---------------------|
| Body | PBT |
| Contact Carrier | White Nylon |
| Terminal Retainer | Clear polycarbonate |
| Contacts | Nickel plated brass |
| Core | White Nylon |
| Terminal Screws | Nickel plated brass |
| Hardware | Stainless Steel |

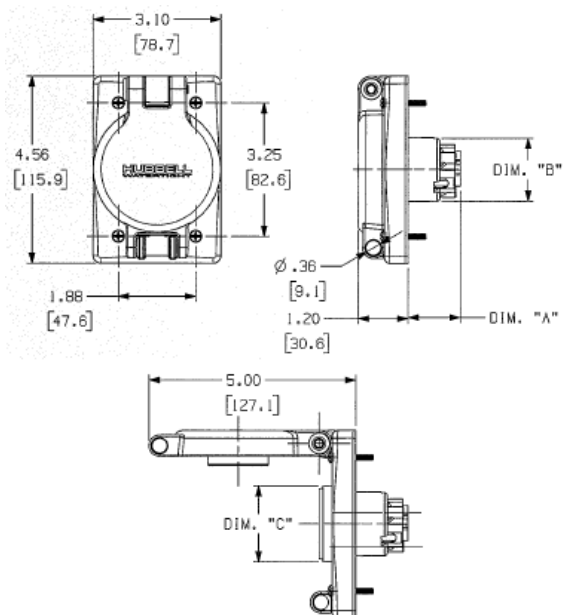

Performance

Electrical

| | |
|----------------------|--|
| Current Interrupting | Rated for current interruption per UL498 |
| Dielectric Voltage | 2500V AC |
| Max Working Voltage | As marked |
| Temperature Rise | 30°C max per UL498 at rated current |

Environmental

| | |
|------------------------|--|
| Moisture Resistance | UL Listed 4, 4X, 12, 6, 6P |
| Operating temperatures | -40°C (without impact) to +60°C continuous |
| UV resistance | All exposed materials are UV stabilized |

Complementary Products

| | |
|-----------------|----------|
| Watertight Plug | HBL28W74 |
|-----------------|----------|

Online Resources

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

