


Twist-Lock® Devices
 20A, 125/250V AC, 3 Pole, 4 Wire Grounding
 Insulgrip® Flanged Receptacle

HUBBELL

Features

- Backwired terminations for ease of installation
- #10-32 Multiple drive terminal screws (Slotted, Phillips, Robertson)
- Mounting screws included



Ordering Information

| Description | Device Color | UPC | Catalog Number |
|--------------------------|--------------|--------------|----------------|
| Nylon casing, back wired | White | 783585038186 | HBL2416 |




Listings

Listed to UL 498
 Fed. Spec. W-C-596
 Certified to CSA C22.2 No.42

Specifications

| | |
|-------------------|---|
| Housing | Nylon |
| Terminal Retainer | Clear polycarbonate |
| Contacts | Brass |
| Terminal Screws | #10-32 Brass (Phillips / Slotted / Robertson) |
| Terminal Clamp | Cold rolled steel – nickel plated |
| Assembly Screws | Steel - nickel plated |
| Mounting Screw | Nickel plated brass |

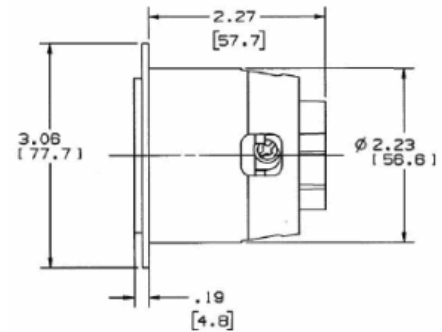

Performance

Electrical

| | |
|----------------------|--|
| Current Interrupting | Certified for current interrupting at full rated current |
| Dielectric Voltage | Withstands 2,000V minimum |

Mechanical

| | |
|------------------------|--|
| Terminal Accommodation | #16 AWG - #8 AWG solid or stranded copper wire only. |
|------------------------|--|

| | |
|-------------------------|--|
| Terminal Identification | Terminals identified in accordance with UL 498 |
|-------------------------|--|

Environmental

| | |
|------------------------|---|
| Flammability | HB or better per UL94/CSA 22.2 No.0.17 |
| Moisture Resistance | IP20 Suitability |
| Operating Temperatures | Maximum Continuous 75°C; Minimum -40°C (w/o impact) |

Accessories

| | |
|-------------------------|---------|
| Plug | HBL2411 |
| Weatherproof Lift Cover | WP2 |

Resources

Customer Use Drawing
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

