

Twist-Lock® Devices
 15A, 125V, 2 Pole, 2 Wire Non-Grounding
 Insulgrip® Flanged Inlet

HUBBELL



Features

- Impact resistant thermoplastic construction
- Backwired terminations for ease of installation
- Mounting screws included



15A 125V
 NEMA L1-15P
 UL Listed
 0.5 HP



Ordering Information


Description	Device Color	UPC	Catalog Number
Nylon casing, polarized, backwired.	White	783585178004	HBL7524C

Listings

Listed to UL 498
 Fed. Spec W-C-596
 Certified to CSA C22.2 No. 42

Specifications

Housing	Nylon
Terminal Retainer	Clear polycarbonate
Blades	Brass
Terminal Screws	#8-32 Brass (Phillips / Slotted / Robertson)
Terminal Clamp	Cold rolled steel – nickel plated
Assembly Screws	Steel – nickel plated
Mounting Screw	Nickel plated brass

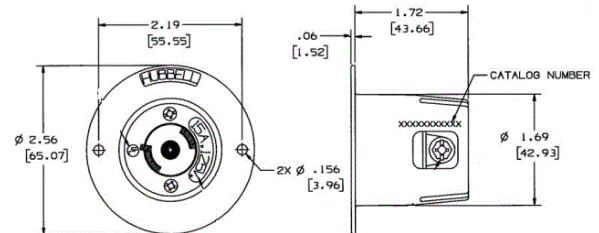

Accessories

Connector	HBL7506C
Weatherproof Lift Cover	WP1

Resources

Customer Use Drawing
 eCatalog

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accommodation	#18 AWG - #10 AWG solid or stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498
Environmental	
Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C; Minimum -40°C (w/o impact)

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

