

Straight Blade Devices 50A, 3 Phase 250V AC, 3 Pole, 4 Wire Grounding Plug

HUBBELL



Features

- Gripping ribs provide secure gripping area
- Supertough nylon housing
- Catalog number, ratings and certifications molded in face



Ordering Information

| Description | Cord Diameter | UPC | Catalog Number |
|-------------|-----------------------------|--------------|----------------|
| Plug, nylon | .625"-1.310" (15.9-33.3) | 783585015163 | HBL8451C |

Listings


UL Listed File E1706
CSA Certified

Specifications

| | |
|----------------|------------------------------------|
| Housing | Supertough Nylon |
| Blade Holder | Reinforced Thermoplastic Polyester |
| Blades | Brass |
| Box Terminals | Copper Alloy |
| Mounting Screw | Stainless steel |

Performance

| | |
|-------------------------|--|
| Electrical | |
| Current Interrupting | Certified for current interrupting at full rated current |
| Dielectric Voltage | Withstands 2,000V minimum |
| Mechanical | |
| Product Identification | Ratings are a permanent part of the device |
| Terminal Accommodation | #12 AWG through #4 AWG copper wire only |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA |
| Environmental | |
| Flammability | UL 94 HB |
| IP Suitability | IP20 |
| Operating Temperatures | Maximum continuous 75°C; minimum -40°C (w/o impact) |

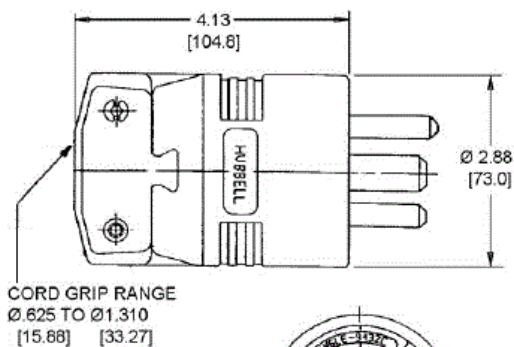

Resources

Customer Use Drawing
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

