

Straight Blade Devices
 20A, 3 Phase Y 120/208V AC, 4 Pole, 4 Wire
 Non-Grounding
 Plug

HUBBELL



Features

- Industrial heavy duty plug
- Angled, low profile
- 4-position assembly

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Plug, nylon, angle, 4-position	.390"-.775"(9.9-19.7)	783585013282	HBL7251C

Listings

UL Listed to UL498 File E1706
 NEMA® WD-6 Compliant

Specifications

Housing/Cord Clamp	Nylon
Blade Holder	Nylon
Terminal Retainer	Clear Polycarbonate
Blades	Brass
Terminal Screws	Brass
Terminal Clamp	Nickel plated steel
Assembly Screws	Zinc plated steel

Performance

Electrical


Current Interrupting Certified for current interrupting at full rated current
 Dielectric Voltage Withstands 2,000V minimum

Mechanical

Cord Accomodation .390"-.775"(9.9-19.7)
 Terminal Accommodation #14-10 AWG. Standed copper wire only
 Terminal Identification Terminals identified in accordance with UL 498 and CSA

Environmental

Flammability UL 94 V-2
 IP Suitability IP20
 Operating Temperatures Maximum continuous 75°C; minimum -40°C (w/o impact)

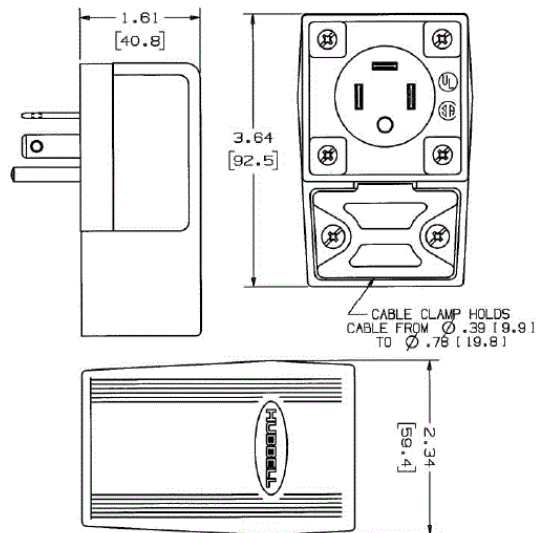

Resources

Customer Use Drawing
 eCatalog