

Straight Blade Devices
 20A, 3 Phase 250V AC, 3 Pole, 4 Wire
 Grounding
 Single Receptacle

HUBBELL



Features

- Industrial Heavy Duty Receptacle
- Deep body design
- Impact resistant

Ordering Information

Description	Device Color	UPC	Catalog Number
Receptacle, black nylon body, back and side wired	Black	783585015880	HBL8420

Listings

UL Listed to UL498 File E1706
 CSA Certified to C22.2 No. 42 File 280C
 NEMA® WD-6 Compliant



Specifications

Body	Nylon
Base	PBT
Contacts	Brass
Mounting Plate	Steel
Terminal Screws	Brass
Terminal Clamp	Nickel plated steel
Mounting Screws	Plated steel
Ground Contact Assembly	Brass

Performance

Electrical


Current Interrupting Certified for current interrupting at full rated current
 Dielectric Voltage Withstands 2,000V minimum

Mechanical

Terminal Accommodation #14-#10 AWG copper stranded or solid conductor only
 Terminal Identification Terminals identified in accordance with UL 498 and CSA

Environmental

Flammability UL 94 V-2
 IP Suitability IP20
 Operating Temperatures Maximum continuous 75°C; minimum -40°C (w/o impact)

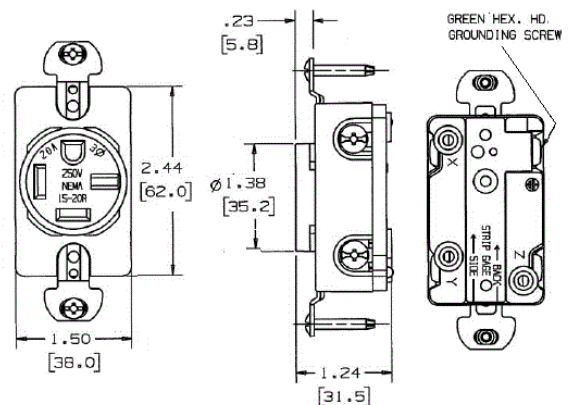

Resources

Customer Use Drawing
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

