

Hubbell Straight Blade Devices
60A, 3 Phase Y 120/208V AC, 4 Pole, 4
Wire Non-Grounding Plug



Features

- Industrial heavy duty plug
- Angled, low profile
- 4-position assembly

Ordering Information

Description	Cord Diameter	Hubbell Number
Plug, nylon, angle, 4-position	.625" - 1.310" (15.9 - 33.3 mm)	HBL7302C


Stay Online Item # 9537

Listings

UL Listed to UL498 File E1706
NEMA® WD-6 Compliant

Specifications

Housing/Cord Clamp	Nylon
Blade Holder	Nylon
Terminal Retainer	Clear Polycarbonate
Blades	Brass
Terminal Screws	Brass
Terminal Clamp	Nickel plated steel
Assembly Screws	Zinc plated steel

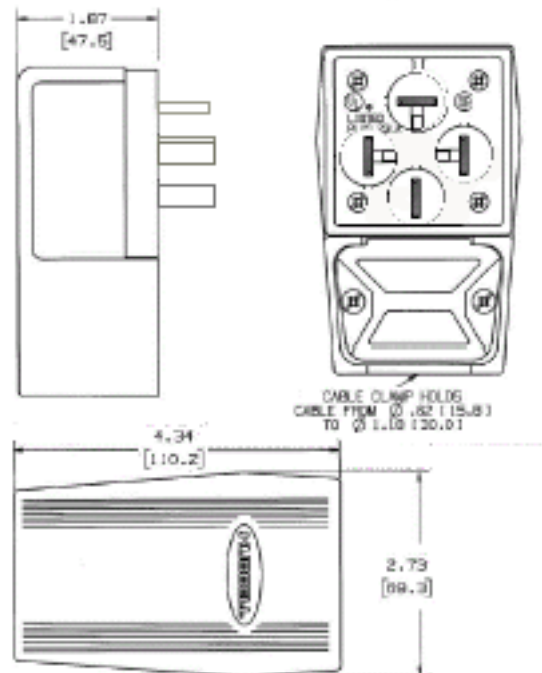

Performance

Electrical

Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

Mechanical

Terminal Accommodation	#14 AWG - #10 AWG Standed copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498.
Cord Accomodation	.390" - .775" (9.9 - 19.7 mm)

Environmental

Flammability	UL94 V-2
Moisture Resistance	IP20
Operating Temperatures	Max Continuous 75°C; Min -40°C (w/o impact)