


**Mold Markings:**  
See Mold Embossing List  
UL US  
15A 250V

**Jacket Marking:**  
UL / CSA

**Mold Markings:**  
See Mold Embossing List  
15A 250V

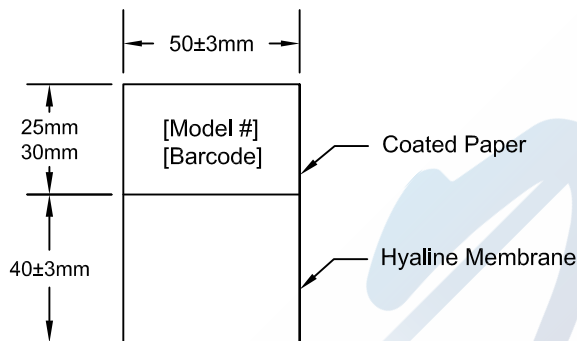

**Packing: Coiled to Ease Installation**

No.	Specification	QTY	Remarks	Mold Embossing List	Tolerances	Approved	Date	<b>StayOnline®</b>					
1	SJT 14/3C 105°C Red	1 PC		Vendor File #	> 0 ± 0.30 mm	Checked	Date	Customer					
2	Plug IEC 60320 C14 Locking Red	1 PC		Power Fig E250704 Stay Online E250704 Yung Li E152635	>1.0 ± 0.50 mm >10.0 ± 1.0 mm >20.0 ± 2.0 mm	Drawn	MG	Date	9/20/2018	Model #	614130-751507		
3	Connector IEC 60320 C13 Red	1 PC		SSEMCO E340286 Scolmore E361125 Volex E62405	Angle: ± 1°	Item No.	6427			Material	PVC	Units	mm
4	LABEL: (40+30) * 30 mm	1 PC	MAX Length = 73mm	Well Shin E115330		Drawing No.	6427		Rev.	A	Scale		