

Quantum Meters | MQ-100, MQ-200, and MQ-300 Series

Measure photosynthetically active radiation in $\mu\text{mol m}^{-2}\text{s}^{-1}$.



Rugged Design

Potted solid sensor head contains no internal air space, and is fully submersible and suitable for use in all climate conditions.

Excellent Cosine Response

Sensors measure PPFD with a cosine response accurate within $\pm 5\%$ at 75° zenith angle.

Spectral Error Reduction

Sensor head features unique blue diffuser to reduce spectral error to less than 5% for sunlight and common electric plant lights and less than 10% for LEDs.

Self-cleaning Head


The patented dome-shape head quickly sheds water, dirt, and other debris, reducing maintenance and maximizing performance in the field.

Reliable Accuracy

To ensure accuracy each sensor is carefully calibrated in controlled conditions and traceable to NIST reference standards.




Cosine Response

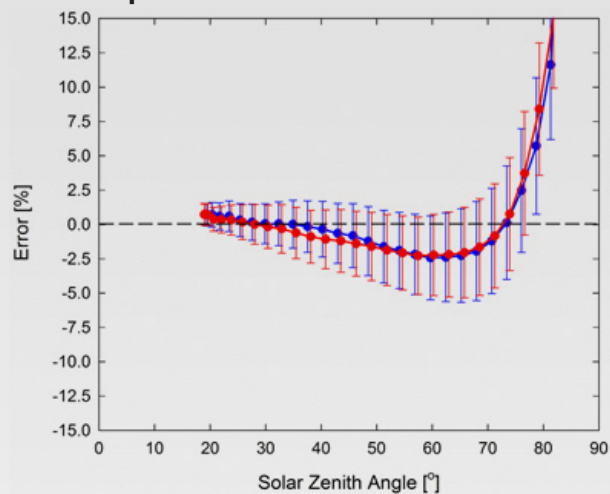


Mean cosine response of twenty-three SQ series quantum sensors (**error bars represent two standard deviations above and below mean**). Cosine response measurements were made by direct side-by-side comparison to the mean of four reference thermopile pyranometers, with solar zenith angle-dependent factors applied to convert total shortwave radiation to PPFD. Blue points represent the AM response and red points represent the PM response.

Spectral Response

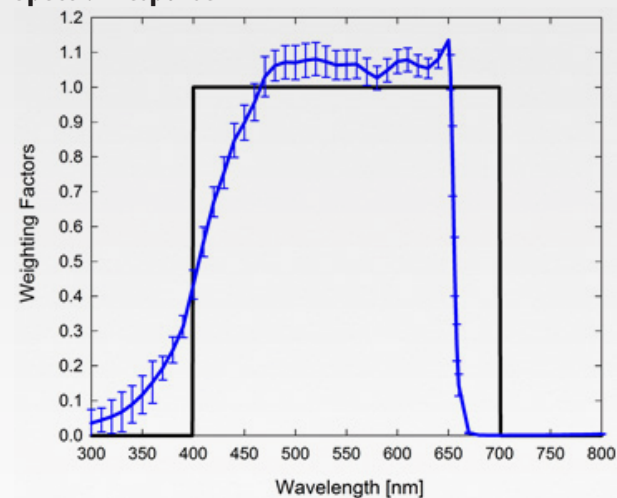

Mean spectral response of six SQ series quantum sensors (**error bars represent two standard deviations above and below mean**) compared to PPFD weighting function. Spectral response measurements were made at 10 nm increments across a wavelength of 300 to 800 nm in a monochromator with an attached electric light source. Measured spectral data from each quantum sensor were normalized by the measured spectral response of the monochromator/ electric light combination, which was measured with a spectroradiometer.

Temperature Response

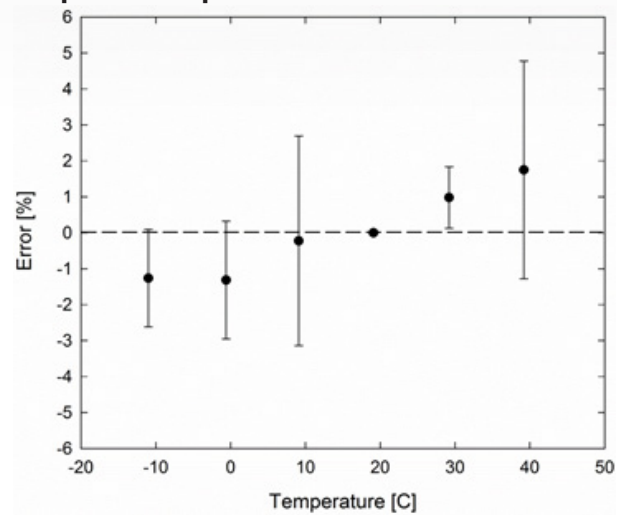


Mean temperature response of eight SQ series quantum sensors (**errors bars represent two standard deviations above and below mean**). Temperature response measurements were made at 10 C intervals across a temperature range of approximately -10 to 40 C in a temperature controlled chamber under a fixed, broad spectrum, electric lamp. At each temperature set point, a spectroradiometer was used to measure light intensity from the lamp and all quantum sensors were compared to the spectroradiometer. The spectroradiometer was mounted external to the temperature control chamber and remained at room temperature during the experiment.

Calibration Traceability

Apogee Instruments MQ series quantum sensors are calibrated through side-by-side comparison to the mean of four Apogee model SQ-110 or SQ-120 transfer standard quantum sensors under high output T5 cool white fluorescent lamps. The transfer standard quantum sensors are calibrated through side-by-side comparison to the mean of at least three LI-COR model LI-190 reference quantum sensors under high output T5 cool white fluorescent lamps. The reference quantum sensors are recalibrated on a biannual schedule with a LI-COR model 1800-02 and quartz halogen lamp are traceable to the National Institute of Standards and Technology (NIST).

Dimensions

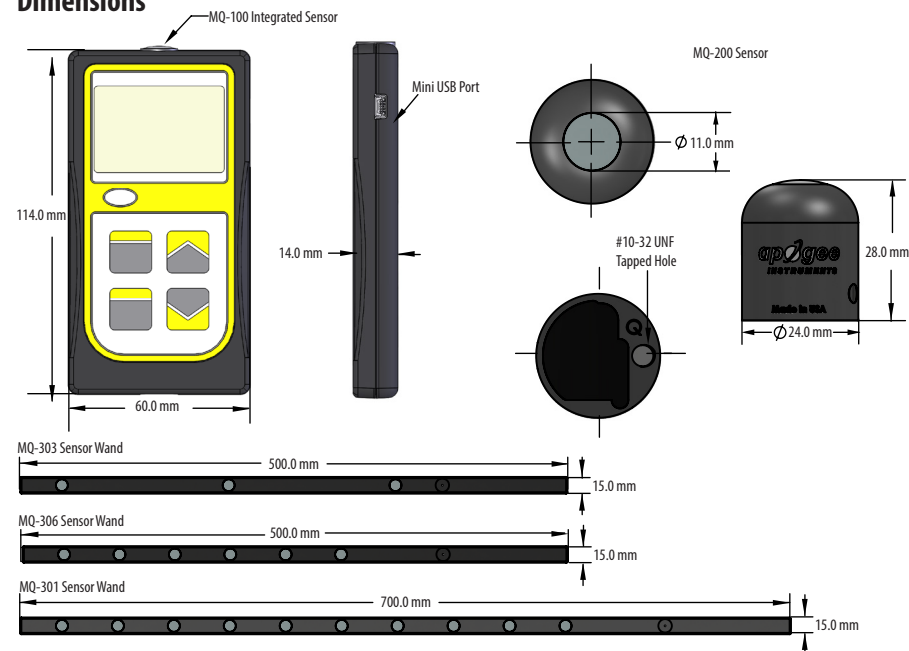

	MQ-100	MQ-200	MQ-301	MQ-303/306
Calibration Uncertainty	± 5 %			
Measurement Repeatability	less than 1 %			
Long-term Drift	less than 2 % per year			
Non-linearity	less than 1 % (up to 3000 μmol m ⁻² s ⁻¹)			
Response Time	less than 1 ms			
Field of View	180 °			
Spectral Range	410 to 655 nm (wavelengths where response is greater than 50% of maximum)			
Directional (Cosine) Response	± 5 % at 75° zenith angle			
Temperature Response	0.06 ± 0.06 % per C			
Operating Environment	0 to 50 C; less than 90% non-condensing relative humidity up to 30 C; less than 70% non-condensing relative humidity from 30 to 50 C; separate sensors can be submerged in water up to depths of 30 m			
Meter Dimensions	113.9 mm height, 59.9 mm width			
Sensor Dimensions	Integrated with Meter	24 mm width, 28 mm height	700 mm length, 15 mm width, 15 mm height	500 mm length, 15 mm width, 15 mm height
Mass	150 g	180 g	380 g	300 g
Cable	2 m of shielded, twisted-pair wire; additional cable available; santoprene rubber jacket (high water resistance, high UV stability, flexibility in cold conditions)			
Warranty	4 years against defects in materials and workmanship			