

Straight Blade Devices
30A, 3 Phase Y 120/208V AC, 4 Pole, 4 Wire
Non-Grounding
Single Receptacle



Features

- Sequenced contacts assure protection
- Catalog number, ratings and certifications molded in face
- One piece design power and ground contacts

Ordering Information

| Description | Device Color | UPC | Catalog Number |
|-----------------------|--------------|--------------|----------------|
| Receptacle, black RTP | Black | 783585015453 | HBL8330A |

Listings


UL Listed File E2186
Certified to CSA
NEMA® WD-6 Compliant

Specifications

| | |
|----------------|------------------------------------|
| Housing | Reinforced Thermoplastic Polyester |
| Contacts | Brass |
| Ground Shunt | Brass |
| Mounting Plate | .062 in. (1.5) Pre-Plated steel |
| Box Terminals | Copper |

Performance

| | |
|-------------------------|--|
| Electrical | |
| Current Interrupting | Certified for current interrupting at full rated current |
| Dielectric Voltage | Withstands 2,000V minimum |
| Mechanical | |
| Product Identification | Ratings are a permanent part of the device |
| Terminal Accommodation | #12 AWG through #4 AWG copper wire only |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA |
| Environmental | |
| Flammability | UL 94 V-0 |
| IP Suitability | IP20 |
| Operating Temperatures | Maximum continuous 75°C; minimum -40°C (w/o impact) |

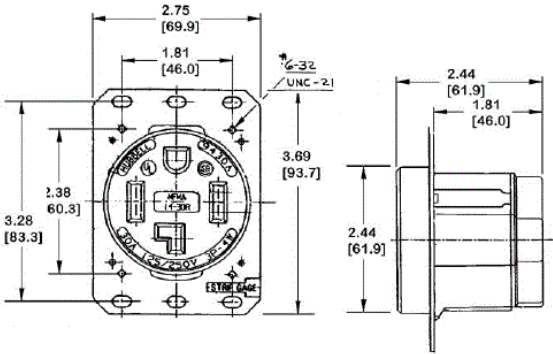

Accessories

Wallplate or Weatherproof Cover 2.48" Opening

Resources

Customer Use Drawing
eCatalog

